



INNOTRIK

AUCTOPUS® Conference Phones a Solution of Teleconference



Still wasting time in airports or railway stations, in a great rush for next meetings in different cities?
 Cannot pass information for the first time to each member of your team?
 Still worried about inconsistent collaboration over geography?
AUCTOPUS Conference Phones will solve all your problems in one step!

**Crystal-clear Sound Quality ,
 New Standard for Everyday Conferencing**



LED: highlight LED indicators reflect refinement with poleless conversion between fascinating red and spearmint.



Keys: top-level process, one million times in life time



Logo: delicate multilayer painting with ultra classic manufacturing process



Housing: UL94V-0 fireproof circuit board and housing



LCD: super large backlit LCD screen makes highend atmosphere



Microphone: multi channel microphone pickup technology in a full 360 degree radius

Taxes Apply


AUCTOPUS® PSTN Conference Phone

AUCTOPUS® Conference Phone Specification Sheet


AUCTOPUS® is a registered trademark of Shenzhen Innotrik Technology Co., Ltd. The AUCTOPUS® Series Conference Phones are an ideal choice for Enterprise-level Conference Calls, which is not only suitable for small and medium-sized conference rooms and various workplaces, but also can be normally used for high end private offices, leisure and entertainment.

Key Features

1. True full-duplex performance, more real time voice transmission
2. Support multi-party voice platform, satisfying requirements of conferences with more than one thousand attending parties.
3. Business style industrial design, effectively raising the Science & Technology level of conference room.
4. Real two-way voice restoration, clearly conveying conference context.
5. Strict product quality standards, industrial level design specifications.
6. Fireproof board and housing design, anti-slip and abrasion-resistant coating surface

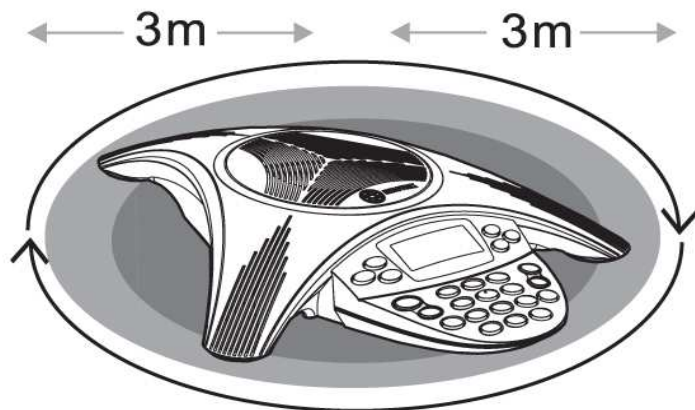

360-Degree Microphone Coverage

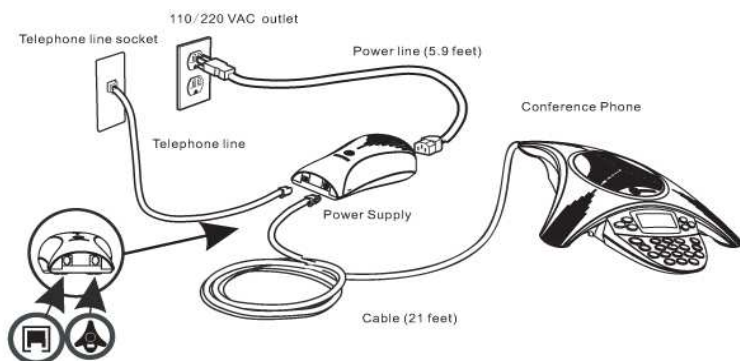

Recommended Room Conditions	1. Reverberation time: <0.5 seconds; 2. Noise level: <48 dBa
Network Interface	Two-wire RJ-11, analog PBX or PSTN interface
Product Standards	YD/T789-2006; GB/T15279-2002
Dial-up Characteristics	DTMF Dual-tone Multi-frequency
Display	128x64 pixel backlit graphical LED
Conference Phone Dimension	37.4cm x 33.0cm x 7.0cm
Power Supply Size	22.0cm x 9.8cm x 6.0cm
Color Box Dimension	39.0cm x 33.5cm x 15.5cm
Conference Phone Weight	924g
Power Supply Weight	310g
G.W.	2.818g
N.W.	1.680g
Warranty	3 years

